



US 20140054966A1

(19) **United States**(12) **Patent Application Publication**
JAIN(10) **Pub. No.: US 2014/0054966 A1**(43) **Pub. Date: Feb. 27, 2014**(54) **SYSTEM AND METHOD FOR EFFICIENT
POWER DISTRIBUTION AND BACKUP****Publication Classification**(71) Applicant: **AiNET Registry, LLC**, Beltsville, MD
(US)(72) Inventor: **Deepak K. JAIN**, Beltsville, MD (US)(21) Appl. No.: **13/945,648**(22) Filed: **Jul. 18, 2013****Related U.S. Application Data**(63) Continuation-in-part of application No. 13/594,533,
filed on Aug. 24, 2012.(51) **Int. Cl.****H02J 9/00**


(2006.01)

(52) **U.S. Cl.**CPC **H02J 9/00** (2013.01)USPC **307/65**

(57)

ABSTRACT

A system and method of power distribution and backup is provided. The power backup system includes a first uninterruptible power supply and a second uninterruptible power supply configured to drive a load in parallel. The first uninterruptible power supply and the second uninterruptible power supply are both connected through a direct connection or through at least two switches to at least two power sources.

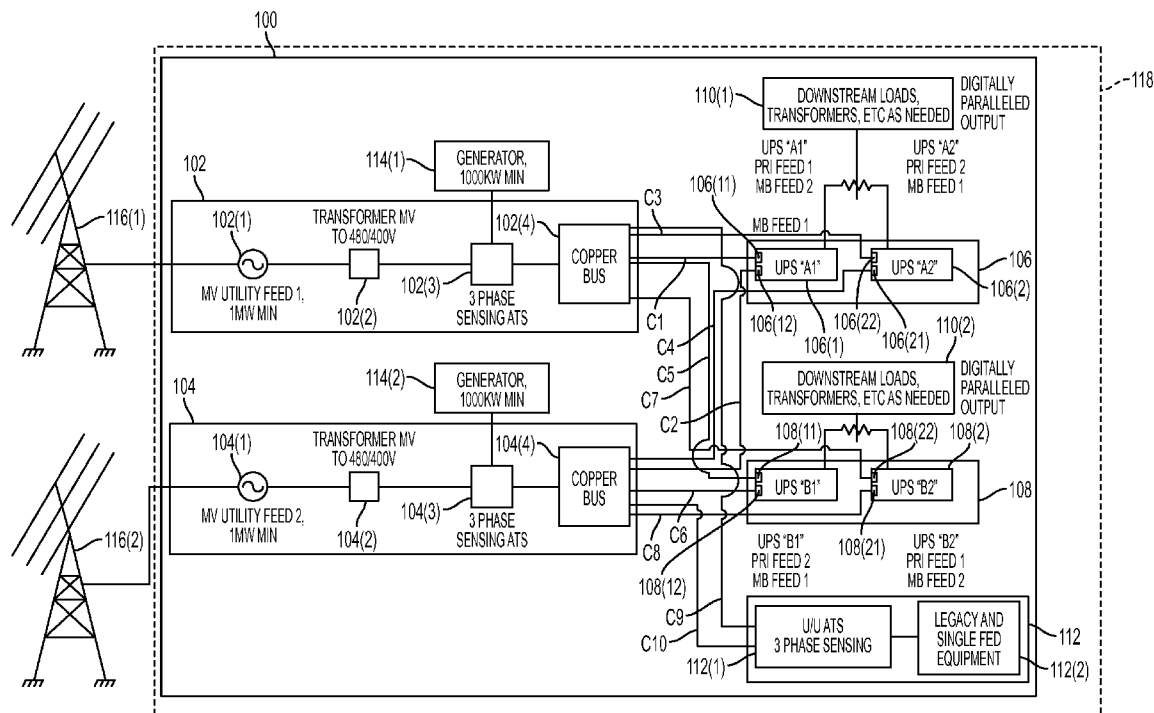

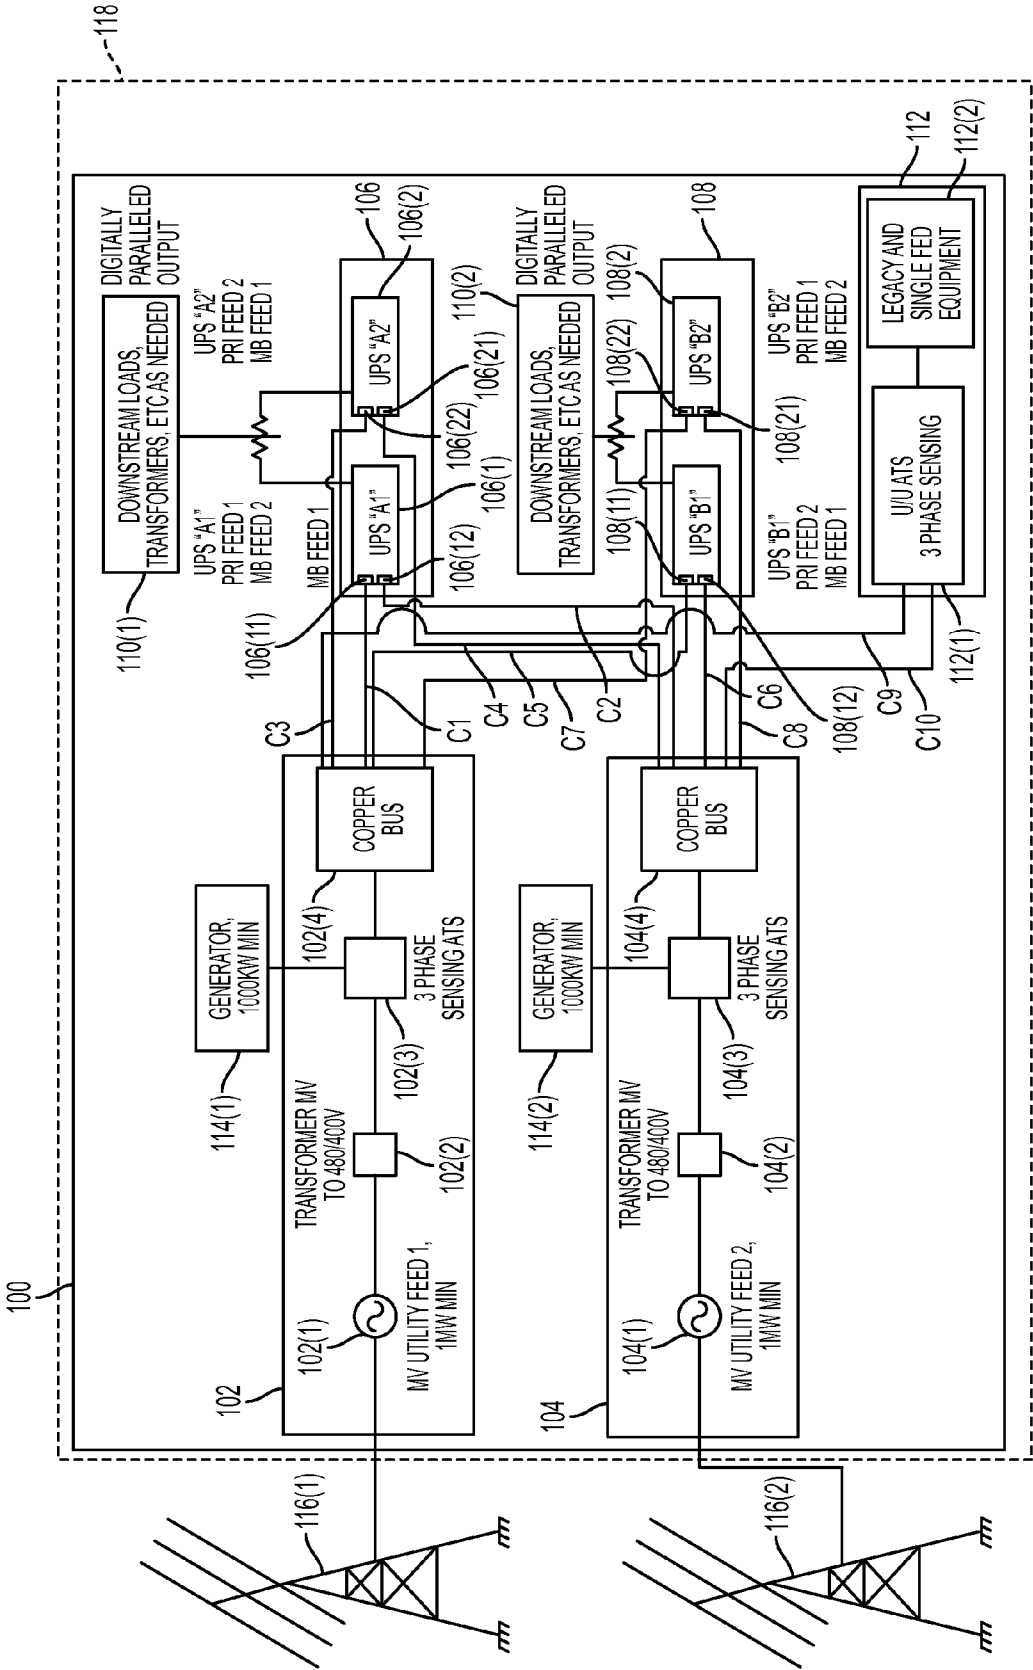


FIG. 1

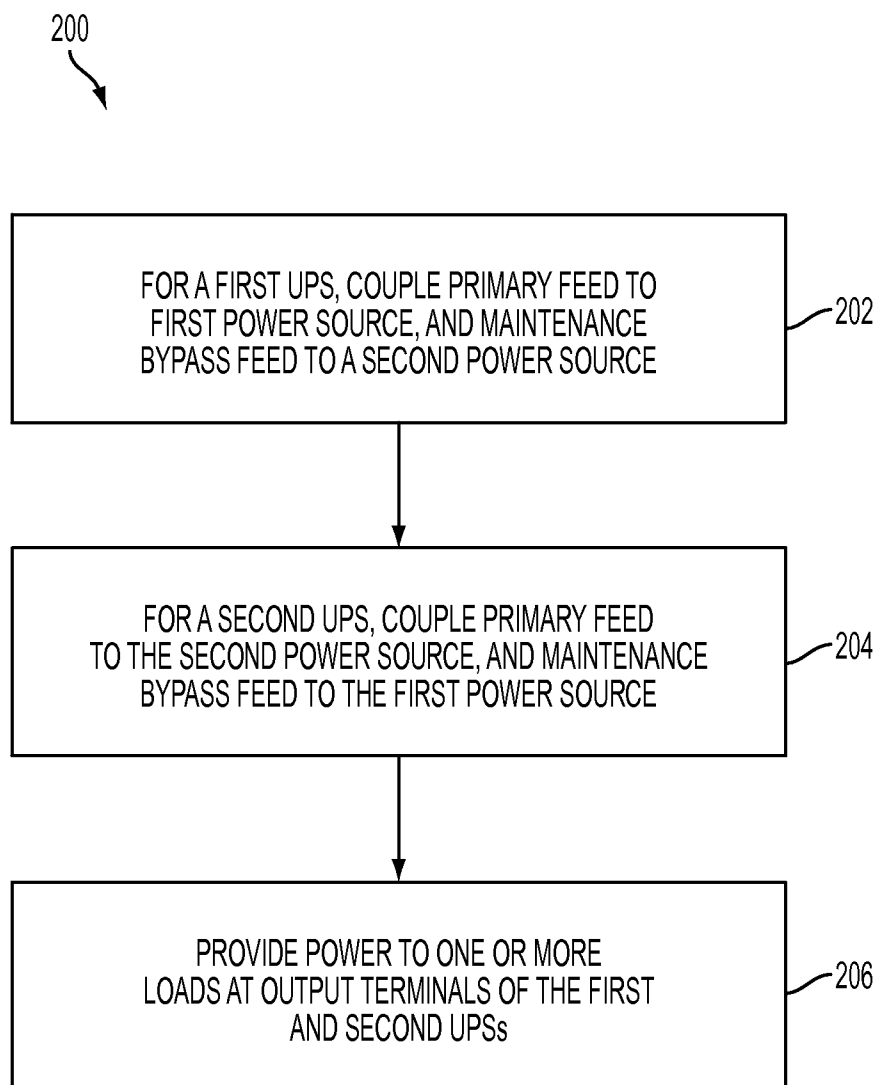


FIG. 2

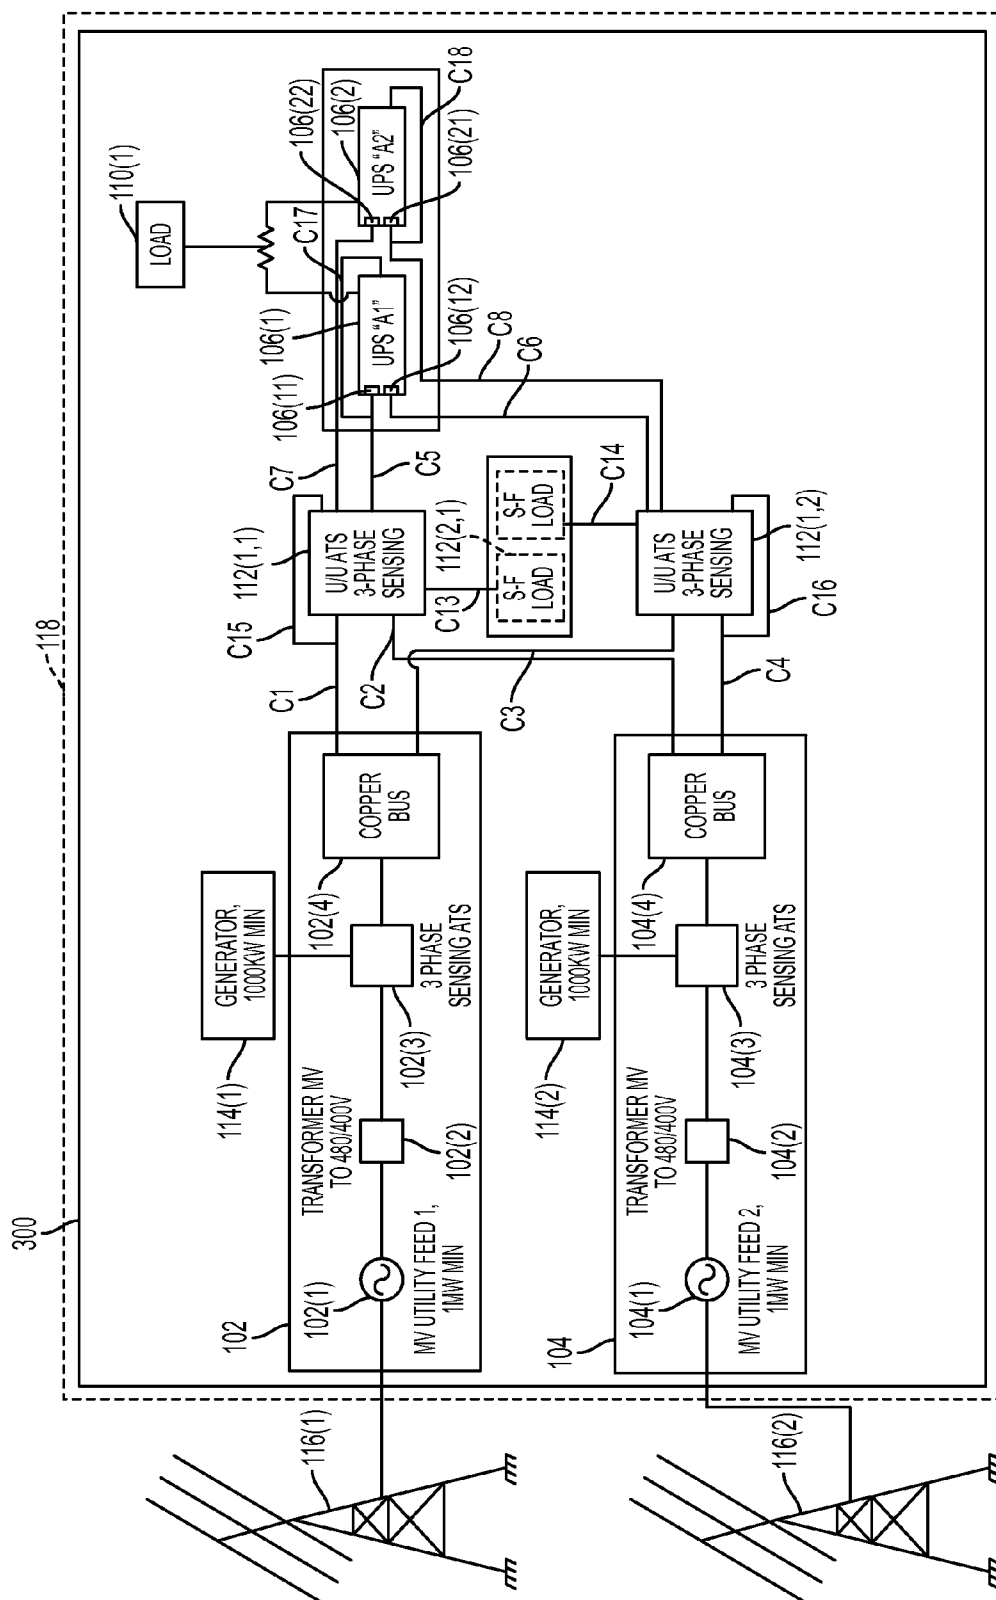


FIG. 3

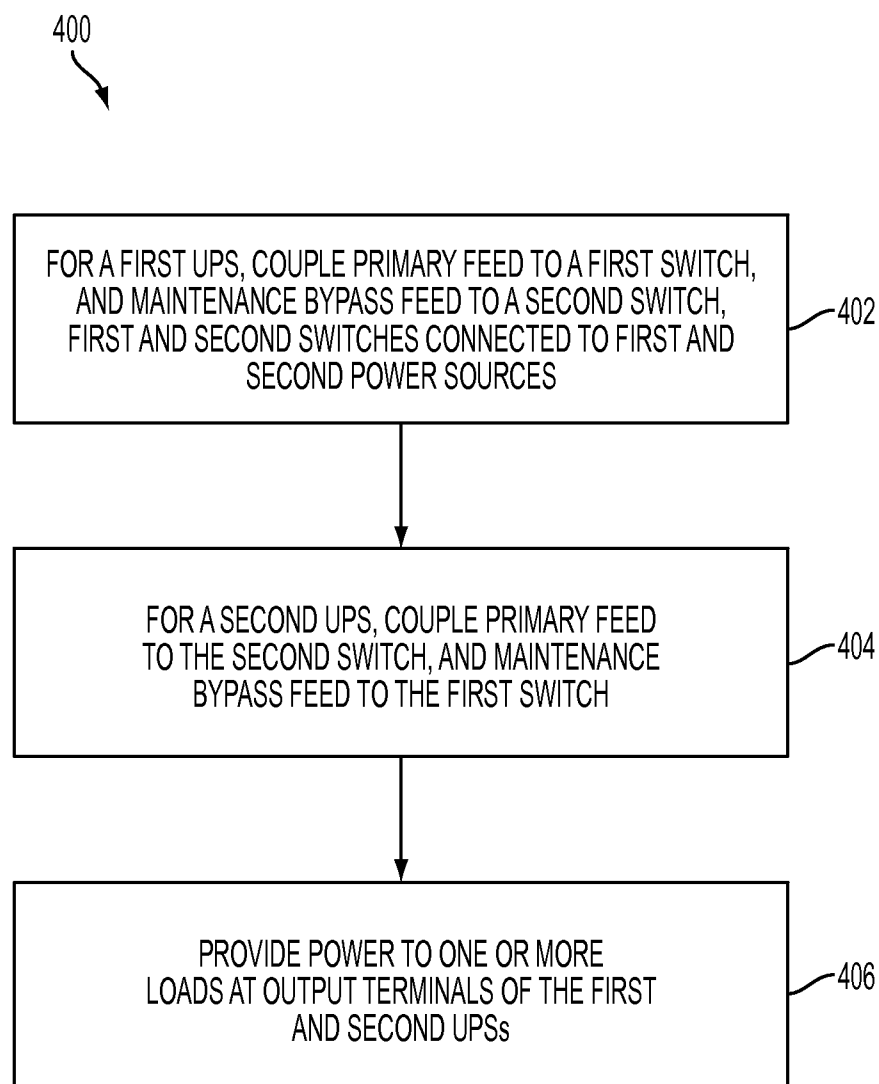


FIG. 4

SYSTEM AND METHOD FOR EFFICIENT POWER DISTRIBUTION AND BACKUP

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part (CIP) application under 35 U.S.C §120 of co-pending U.S. patent application Ser. No. 13/594,533, filed Aug. 24, 2012, the entire contents of which are incorporated herein by reference.

BACKGROUND

Field

[0002] This application is directed generally to power distribution and backup systems, and specifically to uninterrupted power supply systems.

[0003] Conventional uninterrupted power supply systems require active components, e.g., an active switch, between a mains power source or a generator and an input inlet of the individual uninterrupted power supply systems. Such active switches or components are expensive, have to be predetermined for each such system, and are not linearly scalable to additional loads powered by the uninterrupted power supply system. In the event of failure of such active components, the power supply system has to be taken offline for repair, which results in downtime of the power supply system. Further, such active components require synchronization of the power being supplied to the uninterrupted power supply systems' respective inputs to drive loads using synchronized power at respective outputs. These active components may require synchronization of input feeders from utility as well, leading to higher costs, higher losses (inefficiencies), and more failure modes.

[0004] The present disclosure provides improvements over prior art uninterrupted power supply systems.

SUMMARY

[0005] Among other things, this disclosure provides embodiments of a power backup system. The power backup system includes a first uninterruptible power supply and a second uninterruptible power supply configured to drive a load in parallel. The first uninterruptible power supply and the second uninterruptible power supply are both connected through a direct connection to at least two power sources.

[0006] In one embodiment, an uninterrupted power supply system is provided. The uninterrupted power supply system includes a first uninterrupted power supply (UPS), a second UPS connected electrically parallel to the first UPS, a third UPS, and a fourth UPS connected electrically parallel to the third UPS. At least one of the first, the second, the third, and the fourth UPSs include at least two input inlets to directly receive power supply from at least two independent power sources without an active component in between the two independent power sources and the first, the second, the third, and the fourth UPSs, such that the first, the second, the third, and the fourth UPSs supply uninterrupted power to a load.

[0007] In another embodiment, a method for providing power backup is provided. The method includes coupling at least two uninterrupted power supplies (UPSs) directly to at least two independent power sources such that each of the at least two UPSs receives power from the at least two independent power sources. The method includes providing, from the at least two UPSs, uninterrupted power to a load connected in

parallel to the at least two UPSs, wherein upon a failure of one of the at least two independent power sources, the other power source continues supplying power to the at least two UPSs for the providing.

[0008] In yet another embodiment, an uninterrupted power supply system is provided. The uninterrupted power supply system includes a first UPS, a second UPS connected electrically parallel to the first UPS, a third UPS, and a fourth UPS connected electrically parallel to the third UPS. At least one of the first, the second, the third, and the fourth UPSs include at least two input inlets connected to at least two switches to receive power supply from at least two independent power sources. Each of the at least two switches may be connected with the two independent power sources without an active component in between the switch and the power sources. At least one of the at least two switches may be a three-phase sensing switch. The first, the second, the third, and the fourth UPSs supply uninterrupted power to a load.

[0009] In a further embodiment, a method for providing power backup is provided. The method includes coupling at least two uninterrupted power supplies (UPSs) to at least two independent power sources through a first switch and a second switch such that each of the at least two UPSs receives power from the at least two independent power sources. The method further includes providing uninterrupted power to a load from the at least two UPSs, the load being connected in parallel to the at least two UPSs. Upon a failure of one of the at least two independent power sources, the other power source continues supplying power to the at least two UPSs for providing uninterrupted power to the load. At least one of the first and second switches may be a three-phase sensing switch.

BRIEF DISCUSSION OF THE DRAWINGS

[0010] FIG. 1 illustrates a schematic block diagram of a power backup system, in accordance with an embodiment.

[0011] FIG. 2 illustrates a flowchart for a method for providing power backup, in accordance with an embodiment.

[0012] FIG. 3 illustrates a schematic block diagram of a power backup system, in accordance with another embodiment.

[0013] FIG. 4 illustrates a flowchart for a method for providing power backup, in accordance with another embodiment.

DETAILED DESCRIPTION

[0014] FIG. 1 provides a schematic block diagram of an exemplary embodiment of a power backup system 100. Power backup system 100 may include a first power source 102, a second power source 104, a first pair or set of uninterruptible power supplies 106, a second pair or set of uninterruptible power supplies 108, a first load 110(1), a second load 110(2), a first generator 114(1), and a second generator 114(2), although power backup system 100 may include more or lesser number of components. For example, in one embodiment, power backup system 100 may include only first pair of uninterruptible power supplies 106 without second pair of uninterruptible power supplies 108, only one load, or three or more loads. Power backup system 100 includes connections C1-C8 that electrically couple first power source 102 and second power source 104 to first pair of uninterruptible power supplies 106 and second pair of uninterruptible power supplies 108 in the exemplary manner illustrated in FIG. 1. In

addition, first power source **102** and second power source **104** are electrically coupled to a legacy load **112** via electrical connections **C9** and **C10**, respectively. In one embodiment, power backup system **100** includes a generator **114(1)** coupled to first power source **102** and generator **114(2)** coupled to second power source **104**. Electrical power provided by power source **102**, power source **104**, or both is used by first pair of uninterruptible power supplies **106**, second pair of uninterruptible power supplies **108**, or both, and generators **114(1)** or **114(2)**, or both, to drive one or more loads, e.g., load **110(1)** and/or load **110(2)** coupled at respective output terminals (not shown) of first pair of uninterruptible power supplies **106** and second pair of uninterruptible power supplies **108**, respectively. The features and functionalities of power backup system **100** may be achieved using fewer or higher number of components than those disclosed herein. For example, one or more of connections **C1-C10** may be routed via passive components, e.g., circuit breakers or fuses, and the specific arrangement of components shown in power backup system **100** of FIG. 1 is by way of example only, and not by way of limitation. Also, one or more generators may be coupled as **114** for example, a 2 MW generator may feed two 1 MW capacity switches **102** or conversely, two 600 KW generator fees may be synchronized to feed a single 1 MW **102**.

[0015] In one embodiment, power backup system may be located inside a building **118**, e.g., a data center. In one embodiment, power backup system **100** may be located outside a building. In one embodiment, part of power backup system may be located inside building **118**, whereas part of power backup system **100** may be located outside building **118**. For example, first and second power sources **102** and **104** may be located outside building **118**, and first and second pair of uninterruptible power supplies **106** and **108** may be located inside building **118**. Accordingly, various embodiments described herein are not limited by specific location of components of power backup system **100**, and the arrangement illustrated in FIG. 1 is by way of example only.

[0016] First power source **102** includes an alternating current (AC) mains power source **102(1)**. AC mains power source **102(1)** itself may be coupled at its input to a power grid **116(1)** or other power generating facility (not shown), and coupled electrically to a transformer **102(2)** at its output. An output of transformer **102(2)** may be coupled to an automatic transfer switch (ATS) **102(3)**. ATS **102(3)** includes an inlet (not shown) to receive power from generator **114(1)** in an event of a failure of AC mains power source **102(1)**. An output of ATS **102(3)** is further coupled to a bus **102(4)**. Bus **102(4)** outputs power at one or more connections (e.g., connections **C1**, **C3**, **C5**, **C7**, and **C9**).

[0017] Likewise, second power source **104** includes an alternating current (AC) mains power source **104(1)**. AC mains power source **104(1)** itself may be coupled at its input to a power grid **116(2)** or other power generating facility (not shown), and at its output to a transformer **104(2)**. In one embodiment, AC mains power source **102(1)** and AC mains power source **104(1)** may both be coupled to the same power grid **116(1)** or **116(2)**. An output of transformer **104(2)** may be coupled to an automatic transfer switch (ATS) **104(3)**. ATS **104(3)** includes an inlet (not shown) to receive power from generator **114(1)** in an event of a failure of AC mains power source **104(1)**. An output of ATS **104(3)** is further coupled to a bus **104(4)**. Bus **104(4)** outputs power at one or more connections (e.g., connections **C2**, **C4**, **C6**, **C8**, and **C10**). In one

embodiment, second power source **104** is independent of first power source **102**. Alternatively, second power source **104** may be same as or may be dependent upon first power source **102** for power. In one embodiment, first power source **102** and/or second power source **104** may allow for “net-metering” in which owners of loads **110(1)** and **110(2)** may receive financial or energy credit for at least a portion of electricity regenerated and supplied back to power grids **116(1)** and/or **116(2)**. In one embodiment, first power source **102** and/or second power source **104** may allow for “peak shaving” that lets power users (e.g., loads **110(1)** and/or **110(2)**) take advantage of the relatively low cost of utility power during periods of off-peak demand and generate (a portion or all of) their own power during peak periods to avoid high demand charges. In one embodiment, first power source **102** and/or second power source **104** may be in a co-generation mode in coordination with the mains power supplier for cost-savings, energy efficiency, or environmentally friendly “green” applications.

[0018] AC mains power source **102(1)** may be a power source supplying alternating current at a predetermined voltage and frequency (e.g., in transmission voltage (>115 KV), medium voltage (e.g., 33.4 kV), 480V/60 Hz, 277V/60 Hz, 240V/60 Hz, 120V/60 Hz, or other values) from a utility company, for example. In one embodiment, AC mains power source **102(1)** may provide substantially sinusoidal output current with a known quality factor to drive one or more loads, e.g., load **110(1)** and/or load **110(2)**. Likewise, AC mains power source **104(1)** has physical structure and characteristics similar to that of AC mains power source **102(1)**. However, in one embodiment, AC mains power source **104(1)** may output current or power that is unsynchronized with respect to an output at AC mains power source **102(1)**. The term “unsynchronized” relates to output at AC mains power source **102(1)** and AC mains power source **104(1)** being substantially out of phase, substantially out of frequency, substantially out of amplitude, or combinations thereof, with each other. For example, an output phase of AC mains power source **102(1)** may be substantially different from an output phase of AC mains power source **104(1)**. For example, when respective phases of output waveforms at AC mains power source **102(1)** and AC mains power source **104(1)** are outside a predetermined window of tolerance, the two phases are deemed as unsynchronized. In an alternative embodiment, current or power output from AC mains power source **102(1)** and AC mains power source **104(1)** may be synchronized. For example, when respective phases, frequencies, amplitudes, or combinations thereof, of AC mains power source **102(1)** and AC mains power source **104(1)** are within the predetermined window of tolerance of each other, the outputs are deemed as “synchronized.” In one embodiment, AC mains power source **102(1)** and AC mains power source **104(1)** may be supplied synchronized power by the utility power provider. In one embodiment, such synchronization may be achieved without using a paralleling board or a switch board. In one embodiment, output from AC mains power source **102(1)** is exactly same as an output from AC mains power source **104(1)** for all practical purposes. Specific parametric values of output from each of AC mains power source **102(1)** and AC mains power source **104(1)** may depend on specific geographical locations where power backup system **100** is implemented. As noted above, AC mains power source **102(1)** and AC mains power source **104(1)** may be located outside building **118** or in a power/electrical room of building **118** (e.g., a data center). In

one embodiment, AC mains power source **102(1)** and AC mains power source **104(1)** may be replaced by direct current (DC) power sources. By way of example only, and not by way of limitation, AC mains power source **102(1)** and AC mains power source **104(1)** may provide a minimum of 1 MW power. Furthermore, AC mains power source **102(1)** and/or AC mains power source **104(1)** may be single phase, dual phase, or three-phase power sources.

[0019] In one embodiment, transformers **102(2)** and **104(2)** may each be step down transformers capable of outputting at a lower voltage than that provided by AC mains power source **102(1)** and AC mains power source **104(1)**, respectively. In one embodiment, transformers **102(2)** and **104(2)** may each be step up transformers. By way of example only, and not by way of limitation, transformers **102(2)** and **104(2)** may each provide a step down voltage of 480V, or 400V from a value in MV range. Transformers **102(2)** and **104(2)** may step-up or step-down voltages to two or more levels, as needs by loads **110(1)** and/or **110(2)**. Typically, the output ranges needed by UPSs **106(1)**, **106(2)**, **108(1)**, and/or **108(2)** and/or loads **110(1)** and/or **110(2)** may be standard voltages such as 480/400/277/240/220/208/120/110V.

[0020] ATS **102(3)** and ATS **104(3)** may be three-phase sensing switches coupled to an output terminal of transformers **102(2)** and **104(2)**, respectively. In one embodiment, ATS **102(3)** and ATS **104(3)** may be the more common, and less expensive single-phase sensing switches. In addition, ATS **102(3)** and ATS **104(3)** may each receive power from generators **114(1)** and **114(2)**, respectively, in the event that one or more of AC mains power source **102(1)** and AC mains power source **104(1)** fail or under perform. For example, in addition to transferring a load (e.g., load **110(1)**) to generators **114(1)** and **114(2)**, ATS **102(3)** and ATS **104(3)** also command generators **1104(1)** and **114(2)**, respectively, to start, based on the voltage monitored on the primary supply (e.g., AC mains power sources **102(1)** and **104(1)**). ATS **102(3)** and ATS **104(3)** also isolate generators **114(1)** and **114(2)**, respectively, from the electric utility, when generators **114(1)** and **114(2)** are on and are providing temporary power. The control capability of ATS **102(3)** and ATS **104(3)** may be manual only, or a combination of automatic and manual. For example, a controller or processor inside ATS **102(3)** and ATS **104(3)** may continuously, or at preprogrammed time intervals, monitor various quality factors associated with AC mains power source **102(1)**, generator **114(1)**, AC mains power source **104(1)**, and/or generator **114(2)**, respectively, and make a decision to connect/disconnect one or more of AC mains power source **102(1)**, generator **114(1)**, AC mains power source **104(1)**, and/or generator **114(2)** to provide high or acceptable quality of power to buses **102(4)** and **104(4)**. Likewise, ATS **102(3)** and ATS **104(3)** may be operated by a human operator who monitors power quality of output from AC mains power source **102(1)**, generator **114(1)**, AC mains power source **104(1)**, and/or generator **114(2)** and selects the best ones amongst them. Further, such monitoring may be performed remotely in a control room where power quality parameters are computed at ATS **102(3)** and ATS **104(3)** but analyzed and displayed in the control room by computers, and provided to human operators for decision making. In one embodiment, ATS **102(3)** and ATS **104(3)** may have a logic controller implemented using a processor and a memory therein to condition output therefrom. Such conditioning may include, but is not limited to, noise filtering, smoothing, dis-

tortion reduction, and analog or digital signal processing performed on inputs to ATS **102(3)** and ATS **104(3)** prior to outputting.

[0021] Generators **114(1)** and **114(2)** may be for example, 1 MW minimum rating generators, although specific ratings of generators **114(1)** and **114(2)** will depend on current drawn by load **110(1)** and/or load **110(2)**. By way of example only, generators **114(1)** and **114(2)** may be any kind of generators that meet reliability requirements for safe operation of loads **110(1)** and **110(2)**. Typically stationary diesel generators may be used, but mobile, natural gas, propane, steam turbine, or solar generators may be used provided the availability requirements meet the application (loads **110(1)** and **110(2)**'s) needs. These generators may be used to provide peak shaving and other functions in conjunction with the "uninterruptible" power system. Additionally, it is to be noted that the term "generator" may simply be another utility or other power feeder, chosen to meet the requirements of the system or the specific application. There is no requirement that "generator" need to be standby or emergency power and instead may be primary "utility" power as well, though for reliability purposes, generators **114(1)** and **114(2)** may be completely different power feeds than power feeds of either AC mains power source **102(1)** or AC mains power source **104(1)**.

[0022] The output power from ATS **102(3)** and ATS **104(3)** is provided to connections **C1-C10** via buses **102(4)** and **104(4)**, respectively, as illustrated in FIG. 1. In one embodiment, buses **102(4)** and **104(4)** are copper buses, and are passive devices, although other types of buses known to one of ordinary skill in the art may be used. Although only ten output connections **C1-C10** are illustrated, higher or lower number of output connections from buses **102(4)** and **104(4)** may be present depending upon specific applications for which output power from AC mains power source **102(1)** and AC mains power source **104(1)** is to be used, as may be contemplated by one of ordinary skill in the art after reading this disclosure. For example, in one embodiment, connections **C1** and **C3** from bus **102(4)**, and connections **C2** and **C4** from bus **104(4)** connect to and provide power to first pair of uninterruptible power supplies **106**. Likewise, connections **C5** and **C7** from bus **102(4)**, and connections **C6** and **C8** from bus **104(4)** connect to and provide power to second pair of uninterruptible power supplies **108**.

[0023] Connections **C1-C10** are physical connections, for example, power cables with appropriate gauge rating to handle power provided by AC mains power source **102(1)**, generator **114(1)**, AC mains power source **104(1)**, and/or generator **114(2)**. Although, connections **C1-C10** form or are direct connections between AC mains power source **102(1)**, generator **114(1)**, AC mains power source **104(1)**, and/or generator **114(2)** and first pair of UPSs **106**, second pair of UPSs **108**, and legacy load **112**, in one embodiment connections **C1-C10** may be physically routed via passive components such as inductive chokes, circuit breakers, and/or fuses. In one embodiment, connections **C1-C10** may be made of copper, however, any power grade material, e.g., Copper-aluminum alloy material, may be used for connections **C1-C10**.

[0024] In one embodiment, first pair of uninterruptible power supplies **106** include a first uninterrupted power supply (UPS) **106(1)** and a second UPS **106(2)**. Each UPS **106(1)** and **106(2)** may be configured to rectify alternating current (AC) to direct current to drive load **110(1)**. In one embodiment, when load **110(1)** is an alternating current load, such

rectification may not be carried out. In one embodiment, input current to UPS **106(1)** is provided via connections **C1** and **C2** to first power source **102** and second power source **104**, respectively. Likewise, input current to UPS **106(2)** is provided via connections **C3** and **C4** to first power source **102** and second power source **104**, respectively. The input currents received by UPSs **106(1)** and **106(2)** may be unsynchronized relative to each other. In one embodiment, input current to UPS **106(1)** provided via connections **C1** and **C2**, and input current to UPS **106(2)** provided by connections **C3** and **C4** may be synchronized. Regardless of whether the input currents are synchronized or unsynchronized, UPS **106(1)** and UPS **106(2)** provide a digitally synchronized output current to drive load **110(1)**. It is to be noted that although two UPSs **106(1)** and **106(2)** are illustrated, first pair of uninterruptible power supplies **106** may include a higher number of UPSs, in which case the phrase “pair” would no longer be applicable. For example, when first pair of uninterruptible power supplies **106** has three UPSs, it may be referred to as first triplet of uninterruptible power supplies **106**, or generally, first set of power supplies **106**, and the features and functionalities of the embodiments disclosed herein are not limited by specific numbers of UPSs.

[0025] In one embodiment, first UPS **106(1)** has a first primary feed **106(11)** at a first input inlet thereof, and a first maintenance bypass feed **106(12)** at a second input inlet thereof. First primary feed **106(11)** is coupled directly to bus **102(4)** by connection **C1** to receive AC current or power from first power source **102** (e.g., from AC mains power source **102(1)** or generator **114(1)**) at the first input inlet/terminal of UPS **106(1)**. First maintenance bypass feed **106(12)** is coupled directly to bus **104(4)** by connection **C2** to receive AC current or power from second power source **104** (e.g., from AC mains power source **104(1)** or generator **114(2)**) at the second input inlet/terminal of UPS **106(1)**. As referred to herein, the term “directly” relates to a direct connection between respective components being described, without intermediate active devices (e.g., active switches, panel boards, etc.). For example, as described above, connection **C1** forms or is a direct connection between first primary feed **106(11)** and bus **102(4)**. In one embodiment, such direct connections may include passive components in between (e.g., fuses, circuit breakers, breaker panels, etc.) with no substantial active components for switching between buses **102(4)** and **104(4)** of first power source **102** and second power source **104**, respectively.

[0026] In one embodiment, second UPS **106(2)** has a second primary feed **106(21)** at a first input inlet thereof, and a second maintenance bypass feed **106(22)** at a second input inlet thereof. Second primary feed **106(21)** is coupled directly to bus **104(4)** by connection **C4** to receive AC current or power from second power source **104** (e.g., from AC mains power source **104(1)** or generator **114(2)**) at the first input inlet/terminal of UPS **106(2)**. Second maintenance bypass feed **106(22)** is coupled directly to bus **102(4)** by connection **C3** to receive AC current or power from first power source **102** (e.g., from AC mains power source **102(1)** or generator **114(1)**) at the second input inlet/terminal of UPS **106(2)**. It is to be noted that in the arrangement of connections illustrated in FIG. 1, first primary feed **106(11)** and second primary feed **106(21)** are both directly connected to different power sources, viz., first power source **102** and second power source **104**, respectively. Likewise, first maintenance bypass feed **106(12)** and second maintenance bypass feed **106(22)** are

both directly connected to different power sources, viz., second power source **104** and first power source **102**, respectively. In one embodiment, such direct connections may include passive components in between (e.g., fuses, circuit breakers, breaker panels, etc.) with no substantial active components for switching between buses **102(4)** and **104(4)** of first power source **102** and second power source **104**, respectively. An output of second UPS **106(2)** is connected to load **110(1)** with standard impedance matching circuitry in-between (not shown) to drive load **110(1)** in parallel with output from first UPS **106(1)**. In one embodiment, these outputs from first UPS **106(1)** and second UPS **106(2)** are synchronized (e.g., digitally synchronized).

[0027] In one embodiment, second pair of uninterruptible power supplies **108** includes a third UPS **108(1)** and a fourth UPS **108(2)**. Each UPS **108(1)** and **108(2)** may be configured to rectify alternating current to direct current to drive load **110(2)**. In one embodiment, when load **110(2)** is an alternating current load, such rectification may not be carried out. In one embodiment, input current to UPS **108(1)** is provided via connections **C5** and **C6** to first power source **102** and second power source **104**, respectively. Likewise, input current to UPS **108(2)** is provided by connections **C7** and **C8** to first power source **102** and second power source **104**, respectively. In one embodiment, input currents received at UPSs **108(1)** and **108(2)** may be unsynchronized relative to each other. In one embodiment, input current to UPS **108(1)** provided by connections **C5** and **C6**, and input current to UPS **108(2)** provided by connections **C7** and **C8** may be synchronized. Regardless of whether the input currents are synchronized or unsynchronized, UPS **108(1)** and UPS **108(2)** provide a digitally synchronized output current to drive load **110(2)**. It is to be noted that although two UPSs **108(1)** and **108(2)** are illustrated, second pair of uninterruptible power supplies **108** may include a higher number of UPSs, in which case the phrase “pair” would no longer be applicable. For example, when second pair of uninterruptible power supplies **108** has three UPSs, it may be referred to as second triplet of uninterruptible power supplies **108**, or generally, as second set of uninterruptible power supplies **108**, and the features and functionalities of the embodiments disclosed herein are not limited by specific numbers of UPSs.

[0028] In one embodiment, third UPS **108(1)** has a third primary feed **108(11)** at a first input inlet thereof, and a third maintenance bypass feed **108(12)** at a second input inlet thereof. Third primary feed **108(11)** is coupled directly to bus **102(4)** by connection **C5** to receive AC current or power from first power source **102** (e.g., from AC mains power source **102(1)** or generator **114(1)**) at the first input inlet/terminal of third UPS **108(1)**. Third maintenance bypass feed **108(12)** is coupled directly to bus **104(4)** by connection **C6** to receive AC current or power from second power source **104** (e.g., from AC mains power source **104(1)** or generator **114(2)**) at the second input inlet/terminal of third UPS **108(1)**. In one embodiment, such direct connections may include passive components in between (e.g., fuses, circuit breakers, breaker panels, etc.) with no substantial active components for switching between buses **102(4)** and **104(4)** of first power source **102** and second power source **104**, respectively.

[0029] In one embodiment, fourth UPS **108(2)** has a fourth primary feed **108(21)** at a first input inlet thereof, and a fourth maintenance bypass feed **108(22)** at a second input inlet thereof. Fourth primary feed **108(21)** is coupled directly to bus **104(4)** by connection **C8** to receive AC current or power

from second power source **104** (e.g., from AC mains power source **104(1)** or generator **114(2)**) at the first input inlet/terminal of fourth UPS **108(2)**. Fourth maintenance bypass feed **108(22)** is coupled directly to bus **102(4)** by connection C7 to receive AC current or power from second power source **102** (e.g., from AC mains power source **102(1)** or generator **114(1)**) at the second input inlet/terminal of fourth UPS **108(2)**. It is to be noted that in the arrangement of connections illustrated in FIG. 1, third primary feed **108(11)** and fourth primary feed **108(21)** are both directly connected to different power sources, viz., first power source **102** and second power source **104**, respectively. Likewise, third maintenance bypass feed **108(12)** and fourth maintenance bypass feed **108(22)** are both directly connected to different power sources, viz., second power source **104** and first power source **102**, respectively. In one embodiment, such direct connections may include passive components in between (e.g., fuses, circuit breakers, breaker panels, etc.) with no substantial active components for switching between buses **102(4)** and **104(4)** of first power source **102** and second power source **104**, respectively. In one embodiment, these outputs from third UPS **108(1)** and fourth UPS **108(2)** are synchronized (e.g., digitally synchronized).

[0030] The term “uninterruptible” relates to substantially continuous electricity or power supply from one or more of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** to load **110(1)** and/or load **110(2)**. Further, the term “uninterruptible” may refer to outputting electricity or power from one or more of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** to load **110(1)** and/or load **110(2)** in a manner that does not disrupt acceptable performance of loads **110(1)**-**110(n)**. For example, power output from first UPS **106(1)** may, for a period of time, fluctuate. However, as long as such fluctuation does not affect normal operation of load **110(1)**, output current or power from first UPS **106(1)** may still be deemed as “uninterrupted” power supply. The acceptable or normal operation of loads **110(1)** and **110(2)** may depend on specific application for which loads **110(1)** and **110(2)** are used, and as such, the definition of such acceptable performance may vary based on specific circumstances. Contrastingly, when power supply becomes discontinuous, or substantially prevents operation of loads **110(1)** and **110(2)**, then such a power output or supply is deemed as “interrupted” or “discontinuous,” and is by definition, not uninterruptible. In one embodiment, upon a failure of any two UPSs out of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)**, the other two UPSs may continue providing power to a load. In one embodiment, each of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** may be a 500 kW output UPS. By way of example only, and not by way of limitation, one or more of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** may be, but are not limited to single or double conversion, AC-AC, AC-DC-AC, DC-AC, rotary (flywheel, etc.), or the like.

[0031] In one embodiment, legacy load **112** is coupled to bus **102(4)** by connection C9 and to bus **104(4)** by connection C10. Legacy load **112** generally refers to single phase equipment that may be present in building **118**. Legacy load **112** may be equipment that only supports a single power input, and will benefit from first UPS **106(1)** and second UPS **108(1)** that synchronize their output but not necessarily from all four UPSs **106(1)**, **106(2)**, **108(1)**, and **108(2)**. An example of such a load would be a typical monitor for a personal computer

(PC). While servers may be designed with two or more power supplies that may be able to rectify totally unsynchronized loads, consumer and desktop equipment tends to have a single load. In this case, legacy load **112** may power building systems that only support a single input (e.g., Chiller or other heating, ventilation, and air conditioning (HVAC) component, etc.). This shows how power backup system **100** may be applied to existing buildings and designs with little or no modification to the components that don't need the protection. Likewise, ATSs **102(3)** and **104(3)** may be applied after each of respective first and second pairs of UPSs **106** and **108** to provide UPS power to those components that could benefit from the UPS protection. Legacy load **112** may include a three-phase sensing switch **112(1)** to receive AC current or power from first power source **102** and second power source **104**. Three phase sensing switch **112(1)** may be for a utility to utility feed. Based upon sensed power received from first power source **102**, second power source **104**, or both, three-phase sensing switch **112(1)** may drive legacy and single feed equipment **112(2)** or other loads. The term “single feed” refers to loads that have only one input terminal, in contrast with dual feed equipment/devices, e.g., UPSs **106(1)**, **106(2)**, **108(1)**, and **108(2)**, which have at least two input inlets/terminals configured as primary feed and maintenance bypass feed, as described above. In one embodiment, legacy load **112** is optional in which case power backup system **100** will not include connections C9 and C10.

[0032] In one embodiment, loads **110(1)** and **110(2)** may each be servers in a datacenter, which further couple to individual computers (not shown) serviced by the data center. Although loads **110(1)** and **110(2)** have been shown as separate loads, in one embodiment, loads **110(1)** and **110(2)** may be a single load. Further examples of loads **110(1)** and **110(2)** may include additional downstream equipment, transformers, and the like, and the features and functionalities of the embodiments disclosed herein are not limited by the nature of loads **110(1)** and **110(2)**. In an alternative embodiment, more than two loads may be present. In an alternative embodiment, a single server may support more than two power supplies and may connect to multiple power systems **100** as load **110(1)** or **110(2)** with respect to each system. Further, a load **110** may have two power inputs and draw as both loads **110(1)** and **110(2)** for higher reliability (e.g. a dual power supply computer server).

[0033] By way of example only, power backup system **100** is arranged to provide uninterrupted power to one or more of loads **110(1)** and **110(2)**. In one example, power backup system **100** provides continuous uninterrupted power in an event of failure of one or more of power sources (e.g., first power source **102**, second power source **104**, or both). For example, in the example embodiment illustrated in FIG. 1, power backup system **100** has a total of four independent power sources—AC mains power source **102(1)**, AC mains power source **104(1)**, generator **114(1)**, and generator **114(2)**, although in other embodiments, power backup system **100** may have additional number of independent power sources. The arrangement of connections C1-C10 in power backup system **100** insures that as long as at least one of these four power sources is functioning, loads **110(1)** and **110(2)** will always have uninterrupted power supply through UPSs **106(1)**, **106(2)**, **108(1)**, and/or **108(2)**. By way of example only, and not by way of limitation, certain failure modes of power backup system **100** are discussed below.

[0034] In a first failure mode of power backup system 100, AC mains power source 102(1) fails or under performs (e.g., poor quality factor or change in amplitude, frequency, loss of a phase or a “leg,” phase unbalance, etc.). In this mode, ATS 102(3) senses such abnormal conditions and directs power from generator 114(1) to bus 102(4). As a result, loads 110(1) and 110(2), as well as legacy load 112, if present, continue to receive power over respective connections C1-C10. Likewise, only a failure of generator 114(1), does not affect power backup system 100's capability to drive loads 110(1) and 110(2). Similar analysis for such a failure mode, where one of AC mains power source 104(1) or generator 114(2) fails or underperforms, may be carried out. For example, ATS 104(3) may sense abnormal conditions at AC mains power source 104(1), and accordingly may direct power from generator 114(2) to bus 104(4). As a result, loads 110(1) and 110(2), as well as legacy load 112, if present, continue to receive power over respective connections C1-C10. Likewise, only a failure of generator 114(2), does not affect power backup system 100's capability to drive loads 110(1) and 110(2).

[0035] In a second failure mode of power back system 100, first power source 102 as well as generator 114(1) may both fail. In this mode, there is no current or power output from bus 102(4), and therefore, connections C1, C3, C5, C7, and C9 are electrically dead. In one embodiment, “back feeding” via a manual switch or an active component may be used to provide power to C1, C3, C5, C7, and C9 from second power source 104 or generator 114(2), even though second power source 104 or generator 114(2) may be in a failed state. Such back feeding may be useful, for example, in testing the failed components of power back system 100. However, even with a total failure of first power source 102 and generator 114(1), loads 110(1) and 110(2) receive power from second power source 104 and/or generator 114(2). For example, in this failure mode, first primary feed 106(11) does not receive any power over connection C1. However, first maintenance bypass feed 106(12) receives power from second power source 104 over connection C2. As a result, output to load 110(1) from first UPS 106(1) is maintained. Likewise, second primary feed 106(21) of second UPS 106(2) connected to second power source 104 by connection C4 is unaffected by the failure of first power source 102, and continues outputting power to load 110(1). However, second maintenance feed 106(22) connected to and receiving power from first power source 102 over connection C3 does not receive any electrical power when first power source 102 as well as generator 114(1) both fail.

[0036] Similarly, in the second failure mode, although third primary feed 108(11) of third UPS 108(1) does not receive any electrical power from first power source 102 and generator 114(1) over connection C5, and fourth maintenance bypass feed 108(22) of fourth UPS 108(2) does not receive any electrical power from first power source 102 over connection C7, as illustrated in FIG. 1, third maintenance bypass feed 108(12) of third UPS 108(1) and fourth primary feed 108(21) of fourth UPS 108(2) continue to receive power from second power source 104 or generator 114(2) and therefore, can drive load 110(2) with no disruption resulting from failure of first power source 102 and generator 114(1). In addition, in the second failure mode, legacy load 112 still receives power from second power source 104 over connection C10.

[0037] In a third failure mode, second power source 104 as well as generator 114(2) may both fail. In this mode there is no current or power output from bus 104(4), and therefore,

connections C2, C4, C6, C8, and C10 are electrically dead. However, even with a total failure of second power source 104 and generator 114(2), loads 110(1) and 110(2) receive power from first power source 102 and/or generator 114(1). For example, in this failure mode, second primary feed 106(21) of UPS 106(2) does not receive any power from second power source 104 and/or generator 114(2) over connection C4. Similarly, first maintenance bypass feed 106(12) of UPS 106(1) does not receive any power from second power source 104 and/or generator 114(2) over connection C2. However, first primary feed 106(11) and second maintenance bypass feed 106(22) receive power from first power source 102 over connections C1 and C3, respectively. As a result, output to load 110(1) from first UPS 106(1) is maintained.

[0038] Similarly, in the third failure mode, although third maintenance bypass feed 108(12) of third UPS 108(1) does not receive any electrical power from second power source 104 and generator 114(2) over connection C6, and fourth primary feed 108(21) of fourth UPS 108(2) does not receive any electrical power from second power source 104 over connection C8, as illustrated in FIG. 1. However, third primary feed 108(11) of third UPS 108(1) and fourth maintenance bypass feed 108(22) of fourth UPS 108(2) continue to receive power from first power source 102 or generator 114(1) over connections C5 and C7, respectively, and therefore, can drive load 110(2) with no disruption resulting from failure of second power source 104 and generator 114(2). In addition, in the third failure mode, legacy load 112 still receives power from first power source 102 over connection C9.

[0039] In a fourth failure mode, only generator 114(1) may be functioning, and AC mains power source 102(1), AC mains power source 104(1), and generator 114(2) may be out of service. In this failure mode, connections C1, C3, C5, C7, and C9 are active or live since bus 102(4) outputs electrical power from generator 114(1) at these terminals. As a result, even with a failure of AC mains power source 102(1), AC mains power source 104(1), and generator 114(2), loads 110(1), 110(2) and legacy load 112 still receive power. The potential lack of synchronization of generator 114(1) and AC mains power source 102(1) does not affect power backup system 100's ability to drive loads 110(1) and 110(2) because first UPS 106(1) and second UPS 106(2), and third UPS 108(1) and fourth UPS 108(2) may digitally synchronize.

[0040] In a fifth failure mode, only generator 114(2) may be functioning, and AC mains power source 102(1), AC mains power source 104(1), and generator 114(1) may be out of service. In this failure mode, connections C2, C4, C6, C8, and C10 are active or live since bus 104(4) outputs electrical power from generator 114(2) at these terminals. As a result, even with a failure of AC mains power source 102(1), AC mains power source 104(1), and generator 114(1), loads 110(1), 110(2) and legacy load 112 still receive power.

[0041] It is to be noted that the failure modes described above are by way of example only, and not by way of limitation. One of ordinary skill in the art reading this disclosure may contemplate other failure modes that may be one or more combinations of the failure modes described above. For example, even if one of the UPSs in a pair of UPSs fail or underperform, the other UPS in the pair will continue to power the load.

[0042] In one embodiment, only one of first pair of UPSs 106 or second pair of UPSs 108 may be provided to power a load (e.g., load 110(1)). The failure modes described above,

or combinations thereof would still apply and uninterrupted power to the load is still achieved even with only one pair of UPSs. For example, even with different failure modes, UPSs **106(1)** and **106(2)** will continue to receive power from at least one of AC mains power source **102(1)**, AC mains power source **104(1)**, generator **114(1)**, and generator **114(1)**. Further, in one embodiment, when a primary feed of any UPS is not receiving power, that UPS may initially rely on a battery included therein to provide power to a load (e.g., load **110(1)**), and then gracefully transfer power to the load from its maintenance bypass feed. Such graceful transfer may be controlled by a controller (not shown) having a processor and a memory coupled to each other by an internal bus inside the UPS.

[0043] In one embodiment, additional UPSs may be provided. For example, a third pair or set of UPSs (not shown) may be provided where primary feeds of each UPS in the third pair may be connected to different independent power sources, and likewise the maintenance bypass feeds of each UPS in the third pair may be connected to different independent power sources. That is, a primary feed of a UPS in the third pair of UPSs may share a power source (e.g., power source **102** or generator **114(1)**) with a maintenance bypass feed of the other UPS. Likewise, the maintenance bypass feed of the first UPS in the third pair of UPSs may share a common power source with the primary feed of the second UPS in the third pair of UPSs. As a result, the failure mode analysis described above may similarly be extended to any number of UPS pairs or sets, in the manner of connections described above.

[0044] FIG. 2 illustrates a flowchart of a method **200** for providing power backup, using for example, power backup system **100**.

[0045] Method **200** may begin at a process **202** where a primary feed of a first UPS (e.g., first UPS **106(1)**) is directly coupled to a first power source (e.g., AC mains source **102(1)** and/or generator **114(1)**), and a maintenance bypass feed is directly coupled to a second power source (e.g., AC mains source **104(1)** and/or generator **114(2)**). Such direct coupling may include coupling without any active components (e.g., active switches). The first and second power sources are independent power sources and may provide unsynchronized power. Alternatively, the first and second power sources may provide synchronized power even though they may be independent sources of power.

[0046] At a process **204**, a primary feed of a second UPS (e.g., second UPS **106(1)**) is directly coupled to the second power source (e.g., AC mains source **104(1)** and/or generator **114(2)**), and a maintenance bypass feed is directly coupled to the first power source (e.g., AC mains source **102(1)** and/or generator **114(1)**). The couplings are made such that the primary feed of the second UPS is coupled to a power source different from the power source coupled to the primary feed of the first UPS. Likewise, the couplings are made such that the maintenance bypass feed of the second UPS is coupled to a power source different from the power source coupled to the maintenance bypass feed of the first UPS.

[0047] At a process **206**, the first and the second UPSs provide uninterrupted power supply to one or more loads connected in parallel at respective outlets of the first and the second UPSs. Such providing of power to the one or more loads is carried out such that, such that failure of one of the power sources does not affect the output of the first and the second UPSs. In one embodiment, the output from the two UPSs is digitally synchronized to drive the one or more loads.

[0048] It is to be noted that specific order of processes **202-206** described above is by way of example only and not by way of limitation. For example, some processes may be carried out before, or in parallel with other processes. Further, two or more processes may be combined into one without departing from the scope of method **200**. Alternatively or additionally, one or more processes may be optional depending upon specific features and functionalities desired. For example, optionally, additional UPSs (e.g., second pair of UPSs **108**) may be coupled to independent power sources in a manner similar to that described for first and second UPSs in processes **202** and **204** above, and illustrated by way of example only in FIG. 1.

[0049] FIG. 3 provides a schematic block diagram of an exemplary embodiment of a power backup system **300** which may include one or more components similar (in construction and/or functionality) to those described above for power backup system **100** (illustrated in FIG. 1). As such, components of system **300** (illustrated in FIG. 3) which are similar to those in system **100** are referred to using the same labels or referral numerals as in FIG. 1. Power backup system **300** may include first power source **102**, second power source **104**, a pair or set of uninterruptible power supplies **106**, load **110(1)**, a first three-phase sensing switch **112(1,1)**, a second three-phase sensing switch **112(1,2)**, a first legacy and single feed load **112(2,1)**, a second legacy and single feed load **112(2,2)**, first generator **114(1)**, and second generator **114(2)**, although power backup system **100** may include more or lesser number of components. Switches **112(1, 1)**, **112(1, 2)** may be similar to three-phase sensing switch **112(1)** and loads **112(2, 1)**, **112(2, 2)** may be similar to load **112(2)** described above with regard to system **100**. Further, although only one pair or set of supplies **106** are shown, system **300** may include multiple pairs or sets of uninterruptible power supplies **106** (or uninterruptible power supplies **108** illustrated in and described above with respect to FIG. 1).

[0050] In one embodiment, power backup system **300** includes only first pair of uninterruptible power supplies **106** without second pair of uninterruptible power supplies **108** or more than two pairs of uninterruptible power supplies, only one load or three or more loads, only one three-phase sensing switch **112(1)** or three or more three-phase sensing switches **112(1)**, only one load **112(2)** or three or more loads **112(2)**. Power backup system **300** may include connections C1-C4 that electrically couple first power source **102** and second power source **104** to first switch **112(1,1)** and second switch **112(1,2)** in the exemplary manner illustrated in FIG. 3. In one embodiment, switches **112(1,1)**, **112(1,2)** are both directly connected to power sources **102**, **104**, i.e., without an active component in-between. Further, first and second switches **112(1,1)**, **112(1,2)** may be electrically coupled to the pair of uninterruptible power supplies **106** via connections C5-C8 as illustrated in FIG. 3. In addition, first and second switches **112(1,1)**, **112(1,2)** may be electrically coupled to single-feed loads **112(2,1)**, **112(2,2)** via connections C13, C14, respectively. In one embodiment, switches **112(1,1)**, **112(1,2)** each includes an external maintenance bypass connection in which an input of the switch is connected to an output of the switch, e.g., via connections C15 or C16 illustrated in FIG. 3. Generally, switches **112(1,1)**, **112(1,2)** may include a manual maintenance bypass, a service entrance disconnect (or another overcurrent device). Similarly, UPSs **106** include an external maintenance bypass connection in which an input of

the UPS is connected to an output of the UPS, e.g., via connections C17, C18 illustrated in FIG. 3.

[0051] Similar to system 100, system 300 may also include generator 114(1) coupled to first power source 102 and generator 114(2) coupled to second power source 104. Electrical power provided by power source 102, power source 104, or both is used by pair of uninterruptible power supplies 106, and generators 114(1) or 114(2), or both, to drive one or more loads, e.g., load 110(1) coupled at respective output terminals (not shown) of pair of uninterruptible power supplies 106. The features and functionalities of power backup system 300 may be achieved using fewer or higher number of components than those disclosed herein. For example, one or more of connections C1-C8, C13-C18 may similar to the connections of system 100, e.g., the connections of system 300 may be routed via passive components, e.g., circuit breakers or fuses. The specific arrangement of components shown in power backup system 300 of FIG. 3 is by way of example only, and not by way of limitation. Also, one or more generators may be coupled as 114 for example, a 2 MW generator may feed two 1 MW capacity switches 102 or conversely, two 600 KW generator feeds may be synchronized to feed a single 1 MW 102. Power backup system 300 may be located (partially or fully) inside or outside building 118, e.g., a data center. For example, first and second power sources 102 and 104 may be located outside building 118, and first and second pair of uninterruptible power supplies 106 and 108 may be located inside building 118. Accordingly, various embodiments described herein are not limited by specific location of components of power backup system 300, and the arrangement illustrated in FIG. 3 is by way of example only.

[0052] Second power source 104 may be independent of or dependent upon first power source 102 for power. In one embodiment, first power source 102 and/or second power source 104 may allow for “net-metering” and/or “peak shaving”, or may be in a co-generation mode, as described above for system 100. Further, ATS 102(3) and ATS 104(3) may be three-phase sensing switches or single-phase sensing switches, and may have same configurations, capabilities, and functionalities are described with respect to system 100.

[0053] In some embodiments, an output of ATS 102(3) is coupled to bus 102(4). Bus 102(4) outputs power from first power source 102 via one or more connections (e.g., connections C1, C3) to first switch 112(1,1) and second switch 112(1,2). Similarly, an output of ATS 104(3) is coupled to bus 104(4). Bus 104(4) outputs power from second power source 104 via one or more connections (e.g., connections C2, C4) to first switch 112(1,1) and second switch 112(1,2). In one embodiment, buses 102(4) and 104(4) are copper buses, and are passive devices, although other types of buses known to one of ordinary skill in the art may be used. Generally, buses 102(4) and 104(4) may be constructed as a wire trough, or a bus duct or similar passive arrangement with or without service interruption and/or overcurrent protection. Further, buses 102(4) and 104(4) may be defined based on the local electrical code. In another embodiment, system 300 may not include any copper bus, and as such, ATS 102(3), 104(3) may be connected directly to ATS 112(1,1), 112(1,2).

[0054] The output power from ATS 112(1,1) and ATS 112(1,2) is provided to connections C5-C8, respectively, as illustrated in FIG. 3. Although only four output connections C5-C8 are illustrated, higher or lower number of output connections from ATS 112(1,1) and ATS 112(1,2) may be present depending upon specific applications for which output power

from AC mains power source 102(1) and AC mains power source 104(1) is to be used, as may be contemplated by one of ordinary skill in the art after reading this disclosure. For example, in one embodiment, connections C5 and C7 from ATS 112(1,1), and connections C6 and C8 from ATS 112(1,2) connect to and provide power to first pair of uninterruptible power supplies 106.

[0055] Uninterruptible power supplies 106 include a first uninterrupted power supply (UPS) 106(1) and a second UPS 106(2). UPS 106 may have similar configuration, construction and functionalities as described above with regard to system 100 in FIG. 1. For example, UPS 106(1), 106(2) may be configured to rectify alternating current (AC) to direct current to drive load 110(1). In one embodiment, regardless of whether the input currents to UPS pair 106 are synchronized or unsynchronized, UPS 106(1) and UPS 106(2) provide a digitally synchronized output current to drive load 110(1). It is to be noted that although each of UPS 106 is illustrated to include two UPS, UPS 106 may include a higher number of UPSs.

[0056] In one embodiment, first UPS 106(1) has a first primary feed 106(11) at a first input inlet thereof, and a first maintenance bypass feed 106(12) at a second input inlet thereof. First primary feed 106(11) is coupled directly to ATS 112(1,1) by connection C5 to receive AC current or power from first power source 102 (e.g., from AC mains power source 102(1) or generator 114(1)) at the first input inlet/terminal of UPS 106(1). First maintenance bypass feed 106(12) is coupled directly to ATS 112(1,2) by connection C6 to receive AC current or power from second power source 104 (e.g., from AC mains power source 104(1) or generator 114(2)) at the second input inlet/terminal of UPS 106(1).

[0057] In one embodiment, second UPS 106(2) has a second primary feed 106(21) at a first input inlet thereof, and a second maintenance bypass feed 106(22) at a second input inlet thereof. Second primary feed 106(21) is coupled to ATS 112(1,2) by connection C8 to receive AC current or power from second power source 104 (e.g., from AC mains power source 104(1) or generator 114(2)) at the first input inlet/terminal of UPS 106(2). Second maintenance bypass feed 106(22) is coupled directly to ATS 112(1,1) by connection C7 to receive AC current or power from first power source 102 (e.g., from AC mains power source 102(1) or generator 114(1)) at the second input inlet/terminal of UPS 106(2). In one embodiment, the direct connections C5-C8 between ATS 112 and UPS 106 may include passive components in between (e.g., fuses, circuit breakers, breaker panels, etc.) with no substantial active components for switching between ATS 112(1,1) and 112(1,2). An output of second UPS 106(2) is connected to load 110(1) with standard impedance matching circuitry in-between (not shown) to drive load 110(1) in parallel with output from first UPS 106(1). In one embodiment, these outputs from first UPS 106(1) and second UPS 106(2) are synchronized (e.g., digitally synchronized).

[0058] In one embodiment, ATS 112(1,1) is electrically coupled (via connection C13) to provide power and drive single-feed load 112(2,1) and ATS 112(1,2) is electrically coupled (via connection C14) to and drive single-feed load 112(2,2). Loads 112(2,1), 112(2,2) may include a personal computer (PC), computer servers, chiller or heating equipment, ventilation, and air conditioning (HVAC) component, etc.

[0059] In one embodiment, upon a failure of any two UPSs out of first UPS 106(1), second UPS 106(2), the other two

UPSs may continue providing power to a load. In one embodiment, each of first UPS **106(1)** and/or second UPS **106(2)** may be a **500 kW** output UPS. By way of example only, and not by way of limitation, first UPS **106(1)** and/or second UPS **106(2)** may be, but are not limited to, a UPS with single or double conversion, AC-AC, AC-DC-AC, DC-AC, rotary (flywheel, etc.), or the like.

[0060] By way of example only, power backup system **300** is arranged to provide uninterrupted power to one or more of loads **110(1)** and **110(2)**. In one example, power backup system **300** provides continuous uninterrupted power in an event of failure of one or more of power sources (e.g., first power source **102**, second power source **104**, or both). For example, in the example embodiment illustrated in FIG. 3, power backup system **300** has a total of four independent power sources—AC mains power source **102(1)**, AC mains power source **104(1)**, generator **114(1)**, and generator **114(2)**, although in other embodiments, power backup system **100** may have additional number of independent power sources. The arrangement of connections **C1-C8** in power backup system **300** insures that as long as at least one of these four power sources is functioning, loads **110** will always have uninterrupted power supply through UPSs **106(1)** and/or **106(2)** (and/or additional UPSs). Further, system **300** may be configured to handle one or more failure modes described above to provide continuous power to loads **110** (and/or loads **112**) in the manner similar to that discussed above with respect to system **100**.

[0061] In one embodiment, ATS **112(1,1)** has an external maintenance bypass connection in which an input of ATS **112(1,1)** (e.g., the input connected to power source **102**) is connected to one of its output, as illustrated by connection **C15**. Similarly, ATS **112(1,2)** may have an external maintenance bypass connection in which an input of ATS **112(1,2)** (e.g., the input connected to power source **104**) is connected to one of its output, as illustrated by connection **C16**. Such external maintenance bypass connection may include an interlock of multiple circuit breakers, and may be used for removal or replacement of malfunctioning, non-functioning or obsolete ATS **112(1,1)** or **112(1,2)** without any disruption of power provided to loads **110**, **112**. Although not shown, such external maintenance bypass connection may also be used for ATS **102(3)** and/or ATS **104(3)**.

[0062] In one embodiment, UPS **106(1)** and UPS **106(2)** each has a respective external maintenance bypass connection in which an input of UPS (e.g., the primary feed of the UPS) is connected to one of its output, as illustrated by connections **C17**, **C18**. Such external maintenance bypass connection may include an interlock of multiple circuit breakers, and may be used for removal or replacement of malfunctioning, non-functioning or obsolete UPS **106** without any disruption of power provided to loads **110**, **112**.

[0063] FIG. 4 illustrates a flowchart of a method **400** for providing power backup, using for example, power backup system **300**.

[0064] Method **400** may begin at a process **402** where a primary feed of a first UPS (e.g., first UPS **106(1)**) is coupled to a first switch (e.g., ATS **112(1,1)**) and a maintenance bypass feed is coupled to a second switch (e.g., ATS **112(1,2)**). ATS **112(1,1)** and ATS **112(1,2)** may be directly coupled with first and second power sources **102**, **104** as discussed above with regard to FIG. 3. The first and second power sources are independent power sources and may provide unsynchronized power. Alternatively, the first and second

power sources may provide synchronized power even though they may be independent sources of power.

[0065] At a process **404**, a primary feed of a second UPS (e.g., second UPS **106(2)**) is coupled to the second power source (e.g., ATS **112(1,2)**), and a maintenance bypass feed is directly coupled to the first power source (e.g., ATS **112(1,1)**). The couplings are made such that the primary feed of the second UPS is coupled to a power source different from the power source coupled to the primary feed of the first UPS. Likewise, the couplings are made such that the maintenance bypass feed of the second UPS is coupled to a power source different from the power source coupled to the maintenance bypass feed of the first UPS.

[0066] At a process **406**, the first and the second UPSs provide uninterrupted power supply to one or more loads connected in parallel at respective outlets of the first and the second UPSs. Such providing of power to the one or more loads is carried out such that, such that failure of one of the power sources does not affect the output of the first and the second UPSs. In one embodiment, the output from the two UPSs is digitally synchronized to drive the one or more loads.

[0067] It is to be noted that specific order of processes **402-406** described above is by way of example only and not by way of limitation. For example, some processes may be carried out before, or in parallel with other processes. Further, two or more processes may be combined into one without departing from the scope of method **400**. Alternatively or additionally, one or more processes may be optional depending upon specific features and functionalities desired. For example, optionally, additional UPSs (e.g., second pair of UPSs **108**) may be coupled to independent power sources via switches **112** in a manner similar to that described for first and second UPSs in processes **402** and **404** above, and illustrated by way of example only in FIG. 3.

[0068] By way of example only and not by way of limitation, various embodiments described herein advantageously provide synchronized power to one or more loads, e.g., servers in a data center, independent of whether first power source **102** and second power source **104** are synchronized or unsynchronized. The embodiments described herein provide uninterrupted power without having a single point of failure in the power train with substantially 99% energy efficiency. In one implementation, no motorized breaches or panel boards are used between first power source **102**, second power source **104**, generators **114(1)** and **114(2)** and first and second pair of UPSs **106** and **108**, although the from first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** individually may have static transfer switches inside them. Likewise, in one embodiment, switching between first power source **102** and second power source **104** to provide power to first and second pairs of UPSs **106** and **108** may be contactless. Yet another exemplary advantage of various embodiments described herein is that component costs are reduced by up to 70% as compared to active switch implementations. Furthermore, loss of synchronization between first AC mains power source **102(1)** and generator **114(1)**, and/or second AC mains power source **104(1)** and generator **114(2)**, e.g., in an emergency, does not impact the downstream load. Power backup system **100** is scalable linearly for additional power sources and UPSs, with no complex costs associated with centrally controlled components that have to be upsized. Additionally, in one embodiment, the lengths of the conductors between components may be significantly reduced to

reduce resistive loads and further increase efficiency; these are in part enhanced through the increased use of passive components.

[0069] In one embodiment, combinations of power delivery mechanisms may be utilized to output power from first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)**. For example, power may be shared between any pair of UPSs, e.g., first UPS **106(1)** and second UPS **106(2)**. Alternatively, loads **110(1)** and/or **110(2)** may independently receive power from first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)**. Still alternatively, power from one power outlet of first UPS **106(1)**, second UPS **106(2)**, third UPS **108(1)**, and/or fourth UPS **108(2)** can provide power to dual power servers or other loads. In one embodiment, power backup system **100**, and specifically first pair of UPSs **106** and/or second pair of UPSs **108** is configured to provide power outputs of 1 MW to 100 MW, although other higher or lower values of power output may be achieved using other number of UPSs (or different sizes of UPSs).

[0070] The above-discussed embodiments and aspects of this disclosure are not intended to be limiting, but have been shown and described for the purposes of illustrating the functional and structural principles of the inventive concept, and are intended to encompass various modifications that would be within the spirit and scope of the following claims.

What is claimed is:

1. A power backup system, comprising:
a first uninterruptible power supply and a second uninterruptible power supply configured to drive a load in parallel, wherein the first uninterruptible power supply and the second uninterruptible power supply are both connected to at least two power sources through a first switch.
2. The power backup system of claim 1, wherein the first uninterruptible power supply and the second uninterruptible power supply are both further connected to the at least two power sources through a second switch.
3. The power backup system of claim 1, wherein the first uninterruptible power supply and/or the second fourth uninterruptible power supply are configured to switch between power from the at least two power sources, each of the at least two power sources comprising at least one of a generator and an interface to mains power.
4. The power backup system of claim 2, wherein the first switch, the second switch, or both are electrically connected to the at least two power sources directly through a direct connection without an active component in-between.
5. The power backup system of claim 2, wherein at least one of the first switch and the second switch is a three-phase sensing switch.
6. The power backup system of claim 2, wherein the first uninterruptible power supply and the second uninterruptible power supply each comprise a primary feed and a maintenance bypass feed, wherein the primary feed of the first uninterruptible power supply and the primary feed of the second uninterruptible power supply are connected to different switches, and wherein the maintenance bypass feed of the first uninterruptible power supply and the maintenance bypass feed of the second uninterruptible power supply are connected to different switches.
7. The power backup system of claim 6, wherein the primary feed of the first uninterruptible power supply and the maintenance bypass feed of the second uninterruptible power

supply are both connected to the first switch, and wherein the primary feed of the second uninterruptible power supply and the maintenance bypass feed of the first uninterruptible power supply are both connected to the second switch.

8. The power backup system of claim 1, wherein the at least two power sources are mutually synchronized.

9. The power backup system of claim 1, wherein the at least two power sources are independent power sources, and wherein in an event of failure of one of the at least two power sources, the load receives power from the other power source that did not fail.

10. The power backup system of claim 2, wherein the first switch, the second switch or both are directly connected to a single-feed load.

11. The power backup system of claim 10, wherein the single-fed load comprises a plurality of single-feed equipment, and

wherein the first switch is configured to provide power from the at least two power sources to a first portion of the plurality of single-feed equipment, and wherein the second switch is configured to provide power from the at least two power sources to a second portion of the plurality of single-feed equipment, the first portion of the plurality of single-feed equipment being different than the second portion of the plurality of single-feed equipment.

12. The power backup system of claim 6, wherein the first uninterruptible power supply comprises an external maintenance bypass connection in which the primary feed of the first uninterruptible power supply is connected to an output of the first uninterruptible power supply, or the second uninterruptible power supply comprises an external maintenance bypass connection in which the primary feed of the second uninterruptible power supply is connected to an output of the second uninterruptible power supply.

13. The power backup system of claim 2, wherein the first switch comprises an external maintenance bypass connection in which an input of the first switch is connected to an output of the first switch, or the second switch comprises an external maintenance bypass connection in which an input of the second switch is connected to an output of the second switch.

14. An uninterrupted power supply system, comprising:
a first uninterrupted power supply (UPS); and
a second UPS connected electrically parallel to the first UPS,

wherein at least one of the first UPS and the second UPS comprises at least two input inlets connected to at least two switches to receive power supply from at least two independent power sources, wherein each of the at least two switches is connected with the two independent power sources without an active component in between the switch and the power sources, such that the first UPS and the second UPS supply uninterrupted power to a load.

15. The uninterrupted power supply system of claim 14, wherein at least one of the at least two switches is a three-phase sensing switch.

16. A method for providing power backup, comprising:
coupling at least two uninterrupted power supplies (UPSs) to at least two independent power sources through a first switch such that each of the at least two UPSs receives power from the at least two independent power sources; and

providing from the at least two UPSs, uninterrupted power to a load connected in parallel to the at least two UPSs, wherein upon a failure of one of the at least two independent power sources, the other power source continues supplying power to the at least two UPSs for the providing.

17. The method of claim 16, wherein the coupling further comprises coupling the at least two UPSs to the at least two independent power sources through a second switch.

18. The method of claim 17, wherein the first switch or the second switch is a three-phase sensing switch connected directly without an active component to the at least two power sources, each of the at least two power sources comprising at least one of a generator and an interface to mains power.

19. The method of claim 17, wherein the at least two UPSs comprise a first UPS and a second UPS, such that the first UPS comprises a first primary feed and a first maintenance bypass feed and the second UPS comprises a second primary feed and a second maintenance bypass feed, and wherein the coupling comprises:

coupling the first primary feed and the second maintenance bypass feed to the first switch; and
coupling the second primary feed and the first maintenance bypass feed to the second switch.

20. The uninterrupted power supply system of claim 14, wherein the at least two switches are directly connected to a single-feed load.

* * * * *